


HALFEN FPA-SL30 SYSTEM

TECHNICAL PRODUCT INFORMATION

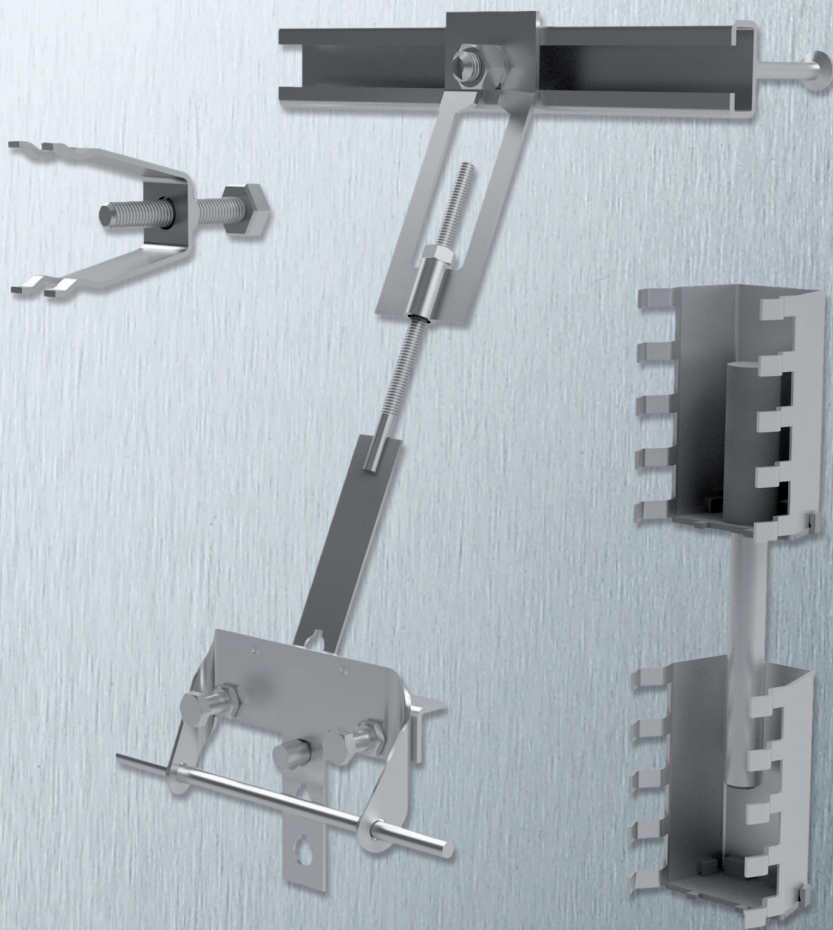

HALFEN PRECAST PANEL ANCHORS

FPA-SL30 19-E

FAÇADE

NEW!

- Fixing system for thin, large-format concrete façade panels
- Façade panel anchor and horizontal anchorages building authority approved for façade panel thicknesses from 3 - 5 cm

HALFEN ANCHORING SYSTEMS CONCRETE FAÇADES

HALFEN – Global market leader for concrete façades fastening systems



Picture provided by the Max Bögl Business Group/ tomjasny.com

Project: maxmodul – administration building TF2



Picture provided by the Max Bögl Business Group/ tomjasny.com

HALFEN ANCHORING SYSTEMS CONCRETE FAÇADES

Contents

General information

- Software	4
- System overview and of planning planning principles	5

Façade panel anchor





- Installation element FPA-E-SL30	6
- FPA-5-SL30	7
- FPA-5A-SL30	8
- FPA-5S-SL30	9
- Anchor design	10
- Dimesion tables - perforated strap	11
- Installing the FPA-SL30 Façade panel anchor	12

Horizontal anchorage / Dowels

- Type overview	14
- DS13-SL30 Spacer bolt; Overview	15
- DS13-SL30; notes on installation and additional reinforcement	16
- DS13-SL30; Load capacities	17
- LD/LD-A Adjustable restraint	18
- HFV-SL30 Dowels; Overview	20
- HFV-SL30; Installation instructions and additional reinforcement	21
- HFV-SL30; Load capacities	22

Calculation form - thermal transfer coefficient	23
---	----

Lifting anchor system HD-SL30	23
-------------------------------	----

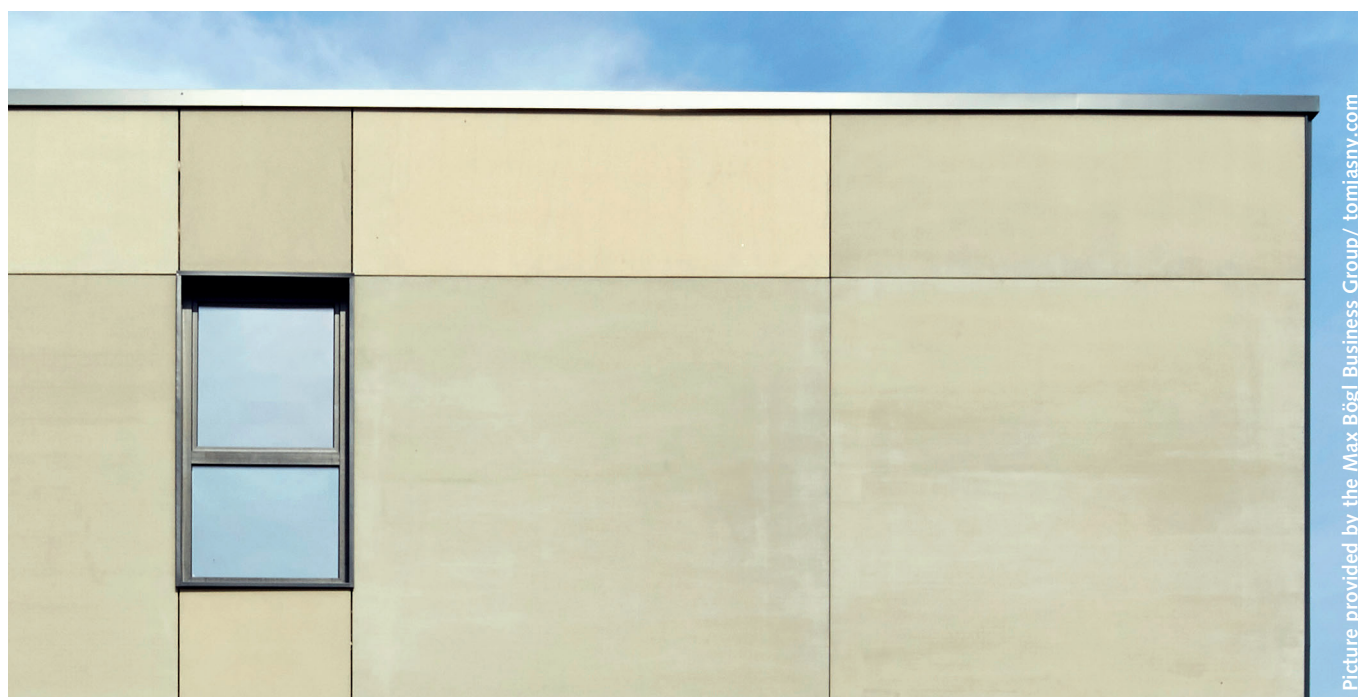

Picture provided by the Max Bögl Business Group/ tomjasny.com

HALFEN - Reliable and economical project planning

This catalogue includes information on necessary constructive planning and dimensioning, the corresponding details for the constructive design of concrete façades, and the necessary anchoring and fixing materials.

HALFEN with its comprehensive range of product also has competent engineers available with extensive experience to assistance with planning,

calculation and static consultation from the beginning of a project through to final installation of the elements.

In addition to one-on-one consultation and the project support provided by the engineers in our technical service team, HALFEN also provides easy-to-use HALFEN Software to facilitate your projects.

HALFEN products provide reliability, quality and safety - for you and your company.




HALFEN Design software — The perfect tool for reliable planning

The HALFEN FPA Design software is user-friendly and easy to use. A calculation is provided after entering the façade panel dimensions, selecting the anchors and if required, various other options.

FPA Software features

- design of asymmetrical slabs
i.e. anchor positioning using the integrated FE core
- FPA and spacer bolts allow increased wall spacing
- all accessories are integrated in the software (horizontal anchors, suction restraints, fixing material)
- pre-set slab geometries (U, L, T, etc.)
- itemized parts listed according to installation and assembly components
- integrated wind load tool
- transfer of dowel loads
- installation plan with anchor positions and type designation
- detailed drawings of all anchoring positions

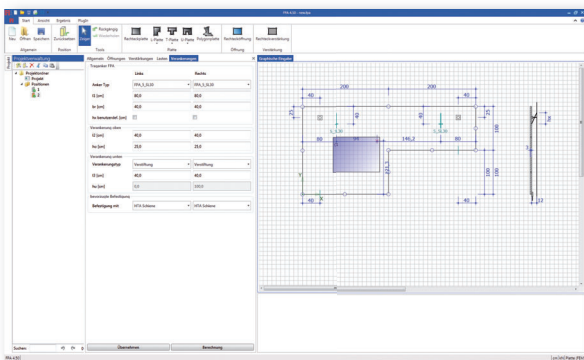

FPA calculation results

- designation of the calculated anchor type
- loads per anchor
- designation of the spacer bolts i.e. dowels
- horizontal anchorage loads
- suction restraints, if required
- results output/printout with drawing



Free and easy-to-use design software
available at

www.halfen.com ▶ Downloads ▶ Software/CAD



More information about **HALFEN Façade panel anchors** fixings can be found in our technical information catalogue "**HALFEN Anchoring system concrete façades**"
www.halfen.com ▶ Publications ▶ Catalogues ▶ Concrete façades



The advantages of the HALFEN FPA-SL30-System at a glance

The use of textile reinforcement eliminates the need for concrete coverings ≥ 25 mm. This allows production of concrete slabs with minimal thickness, i.e. as low as 3 cm. In addition to the direct increase of usable floor space compared to the overall footprint of the building, this also has other advantages:

- **Sustainability (resource efficient construction)**
- **Production costs (low material costs)**
- **Transport costs (reduced slab weight)**

Using thin façade slabs also provide an interesting solution for renovating or upgrading existing façades.

System overview

The HALFEN FPA-SL30 system consists of the following components:

① FPA-SL30

Adjustable suspended, tension-anchor system for transferring the dead-load of façade slabs to the main support structure.

② DS13-SL30

Anchoring element and adjustable spacer bolt for setting the distance to the wall and for transferring horizontal loads

③ HFV-SL30

Adjustable dowel system which provides a positive-locking connection between two façade panel elements


With the building authority approved FPA-SL30 system, statically determined and constraint-free suspended façade panels as thin as 3-5cm are possible. The quick and simple installation of the tried and tested FPA system has not been changed; a supporting structure is not required.

Requirements on the concrete:

- Concrete grade $\geq C50/60$
- Aggregate size ≤ 8 mm

Requirements on the slab reinforcement:

- no specific demands (stainless steel or non-steel mesh reinforcement allowed)
- according to static requirements

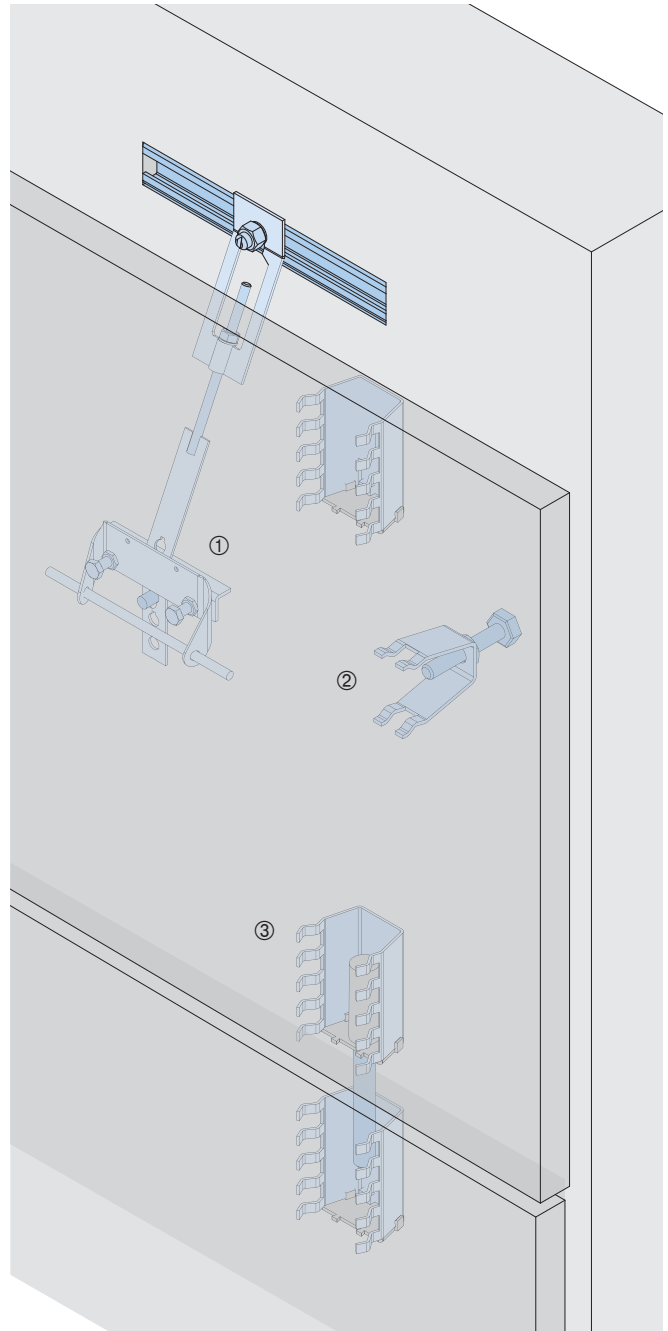


Material: Abbreviations and description

A4/L4	Steel, corrosion resistance class (CRC) III according to DIN EN 1993-1-4: 2015-10, table A.3
-------	--

HALFEN ANCHORING SYSTEMS CONCRETE FAÇADES

HALFEN FPA-SL30 Façade Panel Anchor

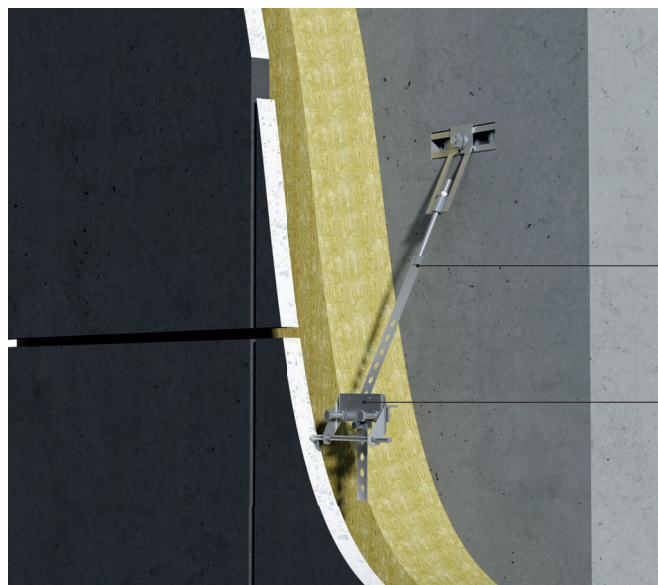

Product components



FPA - M (Installation component):
Perforated strap, nut, washer, locking bolt and top bracket
(Colour code: yellow)

FPA - E - SL30 (Cast-in component):
Bracket element with angled bracket, cross bar and recess former
(Colour code: yellow/turquoise)

FPA-E-SL30 Cast-in component for the precast element

The cast-in component of the SL30 Façade panel anchor system is the same for all types.

The dimensions are listed in the table below, installation instructions can be found on pages 12-13.

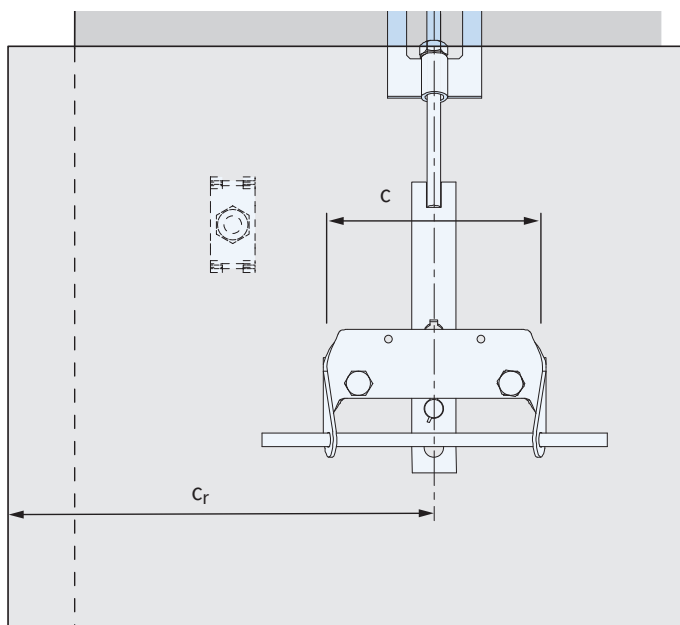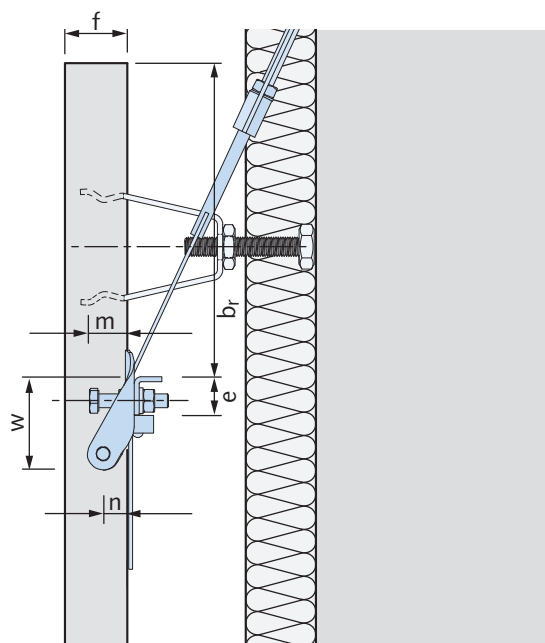

Specifications, Cast-in component FPA-E-SL30 [mm]


Load group	Load capacity $F_{V,Rd}$ [kN]	Cast-in component FPA-E-SL30 for FPA-5, FPA-5A, FPA-5S							
		f	b_r min	c_r min	c	e	m	n	w
5.0	6.75 ①	30-50	60	150	122	22	26	16	54

① See general building authority approval no. Z-21.8-2067 for edge spacings < 60 cm (b_r) or < 75 cm (c_r),


HALFEN ANCHORING SYSTEMS CONCRETE FAÇADES

HALFEN FPA-5-SL30 Façade Panel Anchor

FPA-5-SL30 Façade Panel Anchor

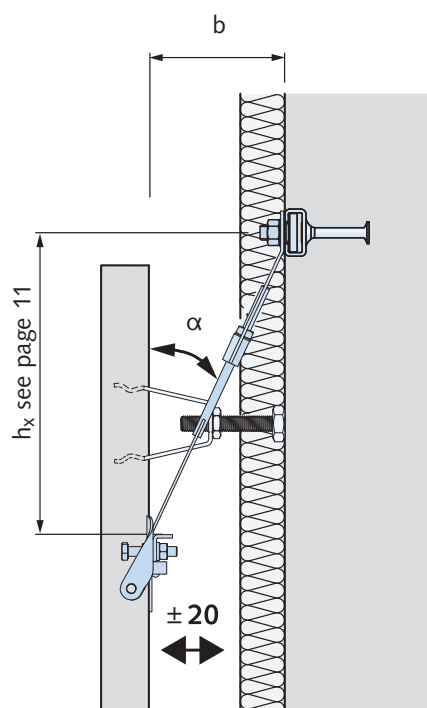

Dimensions in [mm]

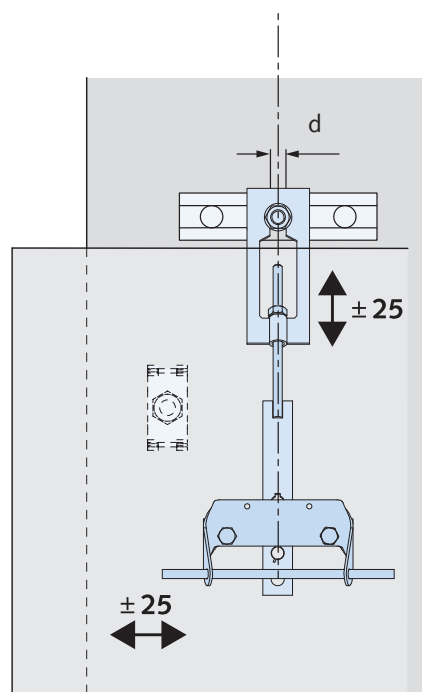

Notes: Use of fixings for façade anchors

We recommend using HALFEN HTA Cast-in channels or dowels suitable for tensile zones. If dowels are used, which are not suitable for use in tensile zones, then these must be verified before application. All fixings must be verified using the effective loads.

Material: A4/L4
(Material specifications, see page 5)

Scope of delivery FPA-5-SL30

FPA - 5 - M (Installation component):
Perforated strap, nut, washer, and top bracket

FPA - E - SL30 (Cast-in component):
Bracket element with angled bracket, cross bar and recess former

FPA - 5 - G - SL30 (Set): includes:

FPA - 5 - M
+ **FPA - 5 - E - SL30**

Order example

FPA - 5 - M - 5,0 - 200

① ② ③ ④ ⑤

- ① Type
- ② Version
- ③ Scope of delivery
- ④ Load class
- ⑤ Wall spacing b

Please order spacer bolts and sleeves separately, see page 15

Specifications FPA-5-SL30

Load group	Load capacity $F_{V,Rd}$ [kN]	Nominal angle α ② with walls spacing = 80 - 350 mm	Hole diameter Installation component d [mm]
5.0	6.75 ①	25.0°	13




① See general building authority approval no. Z-21.8-2067 for edge spacings < 60 cm (b_r) or < 75 cm (c_r)

② More information about the perforated strap can be found on page 11.

HALFEN ANCHORING SYSTEMS CONCRETE FAÇADES

HALFEN FPA-5A-SL30 Façade Panel Anchor

FPA-5A-SL30 Façade Panel Anchor

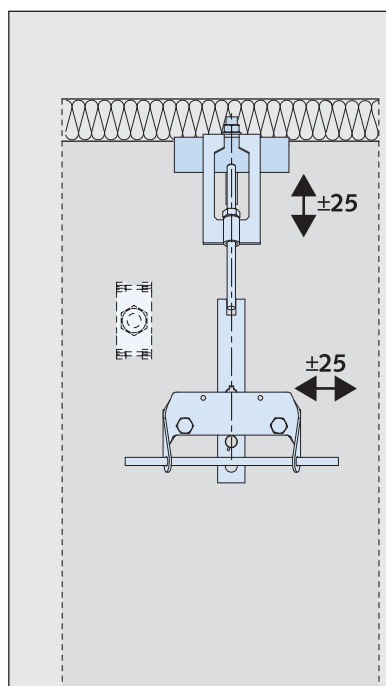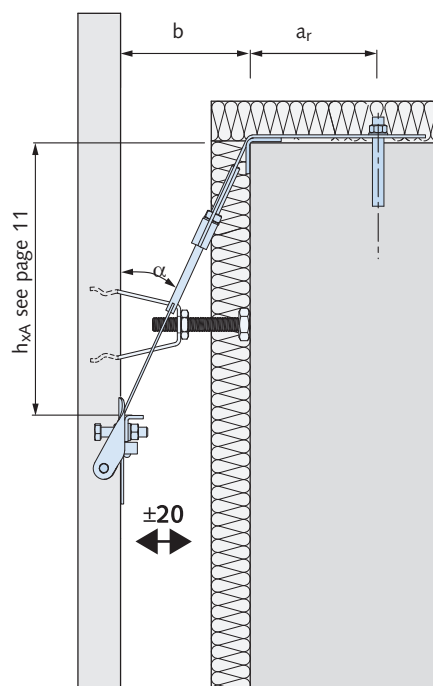

FPA-5A Top bracket

Material: A4/L4
(Material specifications, see page 5)

Dimensions in [mm]

Scope of delivery FPA-5A-SL30

FPA - 5A - M (Installation component):
Perforated strap, nut and washer,
locking bolt, top bracket and edge
protector

FPA - E - SL30 (Cast-in component):
Bracket element with angled bracket,
cross bar and recess former

FPA - 5A - G - SL30 (set):
FPA - 5A - M
+ **FPA - E - SL30**

Please order spacer bolts and sleeves
separately, see page 15

Order example

FPA - 5A - M - 5,0 - 200

- ① Type
- ② Version
- ③ Scope of delivery
- ④ Load class
- ⑤ Wall spacing b

Specifications FPA-5A-SL30

Load group	Load capacity $F_{V,Rd}$ ① [kN]	Nominal angle α ② with walls spacing $b = 80 - 350$ mm	Hole diameter, installation component d [mm]	Hole spacing e_1 [mm]	Edge spacing a_r [mm]
5.0	6.75	25.0°	Ø 11	24	110




① See general building authority approval no. Z-21.8-2067 for edge spacings < 60 cm (b_r) or < 75 cm (c_r),

② More information about the perforated strap can be found on page 11

HALFEN ANCHORING SYSTEMS CONCRETE FAÇADES

HALFEN FPA-5S-SL30 Façade Panel Anchor

FPA-5S-SL30 Façade Panel Anchor

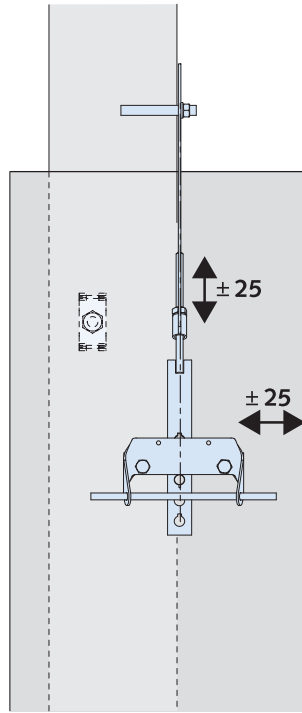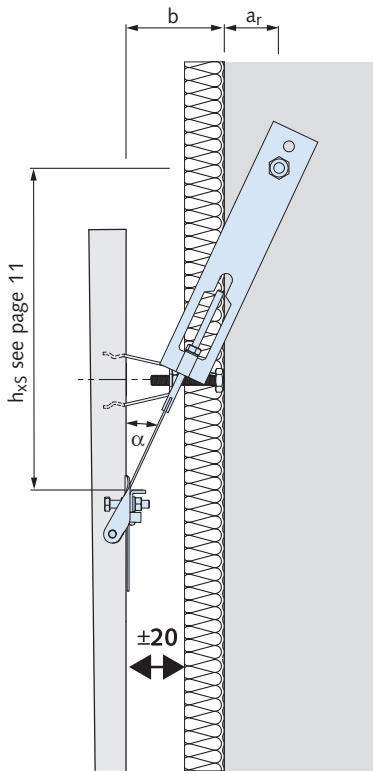

FPA-5S Top bracket

Material: A4/L4
(Material specifications, see page 5)

Dimensions in [mm]

Scope of delivery FPA-5S-SL30

FPA - 5S - M (Installation component):
Perforated strap, nut, washer, locking bolt and top bracket

FPA - E - SL30 (Cast-in component):
Bracket element with angled bracket, cross bar and recess former

FPA - 5S - G - SL30 (set):
FPA - 5S - M
+ **FPA - E - SL30**

Please order spacer bolts and sleeves separately, see page 15

Order example

FPA - 5S - M - 5,0 - 200
① ② ③ ④ ⑤

- ① Type
- ② Version
- ③ Scope of delivery
- ④ Load class
- ⑤ Wall spacing b

Specifications FPA-5S

Load group	Load capacity $F_{V,Rd}$ ① [kN]	Nominal angle α ② with walls spacing $b = 80 - 350\text{mm}$	Hole diameter, installation component d [mm]	Hole spacing e_1 [mm]	Edge spacing a_r [mm]
5,0	6,75	25,0°	Ø 11	24	100

- ① See general building authority approval no. Z-21.8-2067 for edge spacings < 60 cm (b_r) or < 75 cm (c_r),
- ② More information about the perforated strap can be found on page 11

HALFEN ANCHORING SYSTEMS CONCRETE FAÇADES

Static Fundamentals

Calculating the anchor loads

To install a concrete façade panel two façade panel anchors are required as support anchors for the vertical loads (dead load), and four horizontal anchors to ensure correct wall spacing (Standard is two spacer bolts at the top of the panel and two at the bottom).

Actions:

G = Vertical weight from the proportionate weight of the façade panel

For symmetrically suspended anchors, G per anchor = $\frac{1}{2}$ slab weight

w_d = Wind pressure load per horizontal anchor

w_s = Wind suction load per horizontal anchor

Partial safety factor for load actions:

γ_G = 1.35 permanent loads (dead load)

γ_Q = 1.50 variable actions (wind load)

Anchor loads:

V_d = Vertical load in the anchor = $G \times \gamma_G$

H_d = Horizontal load in the anchor = $V_d \times \tan \alpha$

R_d = Resulting diagonal load in the anchor = $\sqrt{V_d^2 + H_d^2}$

Do_d = Horizontal load, top (from $Do_{g,d} + Do_{w,d}$)

Du_d = Horizontal load, bottom (from $Du_{g,d} + Du_{w,d}$)

$Do_{g,d}$ = Horizontal load, top, from dead load $\times \gamma_G$

max. $Do_{w,d}$ = Horizontal load, top, wind load ($w_d \times \gamma_Q$)

min. $Do_{w,d}$ = Horizontal load, top, wind load ($w_s \times \gamma_Q$)

$Du_{g,d}$ = Horizontal load, bottom, from dead load $\times \gamma_G$

max. $Du_{w,d}$ = Horizontal load, bottom, wind load ($w_d \times \gamma_Q$)

min. $Du_{w,d}$ = Horizontal load, bottom, wind load ($w_s \times \gamma_Q$)

Requirements:

If min $Do_d < 0 \rightarrow$ } Suction restraint required (e.g. Adjustable restraint)
If min $Du_d < 0 \rightarrow$ }

Verification:

$\Sigma M_A \rightarrow Du_{g,d} = (H_d \times h_2 + V_d \times f/2) / h_1$

max. $Du_d = Du_{g,d} + \max Du_{w,d}$

min. $Du_d = Du_{g,d} - \min Du_{w,d}$

$\Sigma H \rightarrow Do_{g,d} = H_d - Du_{g,d}$

max. $Do_d = Do_{g,d} + \max Do_{w,d}$

min. $Do_d = Do_{g,d} - \min Do_{w,d}$

Verifying suction restraint:

If min. Do_d i.e. min $Du_d < 0 \rightarrow$ Suction restraint required (for example, adjustable restraint)

According to Expert's report; global safety factor of 1.2 to prevent lift-off (mandatory)



$\rightarrow$ min. $Do_d, Sog = Do_{g,k} - \min. Do_{w,k} \times 1,2$

$\rightarrow$ min. $Du_d, Sog = Du_{g,k} - \min. Du_{w,k} \times 1,2$

In stacked suspended façade panels the bottom spacer bolts can be replaced with HFV dowels. Depending on the expected wind loads, and the shape and size of the slab, additional suction protection may be required for horizontal anchors (for example, compression bolts and Adjustable restraint).



No more than two façade panel anchors may be installed in a single precast element!

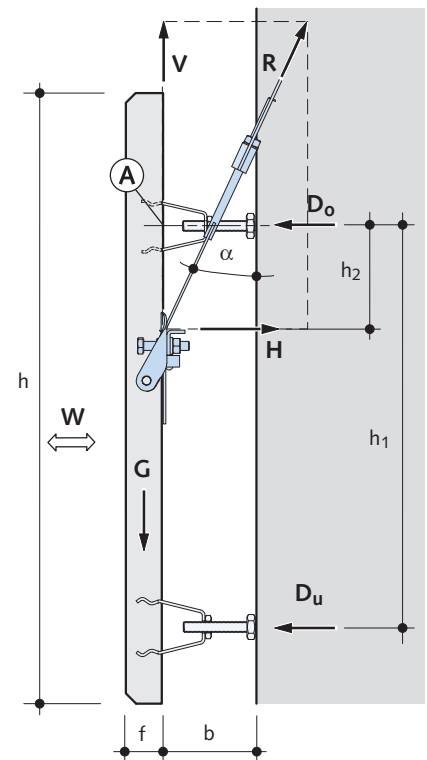


α = Angle of inclination
(see tables on page 7-9)

HALFEN ANCHORING SYSTEMS CONCRETE FAÇADES


Perforated strap for the HALFEN FPA-SL30 Façade Panel Anchor

Perforated strap for the FPA-SL30 Façade Panel Anchor


FPA-5-SL30

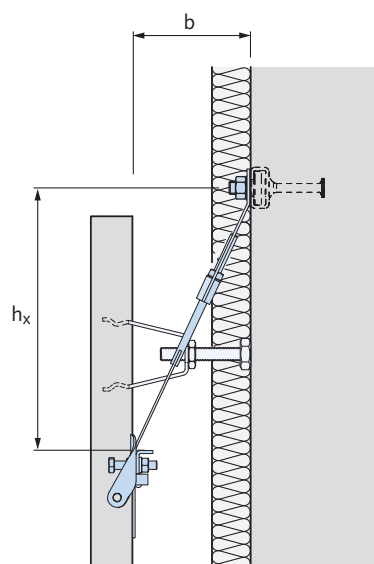

FPA-5A-SL30

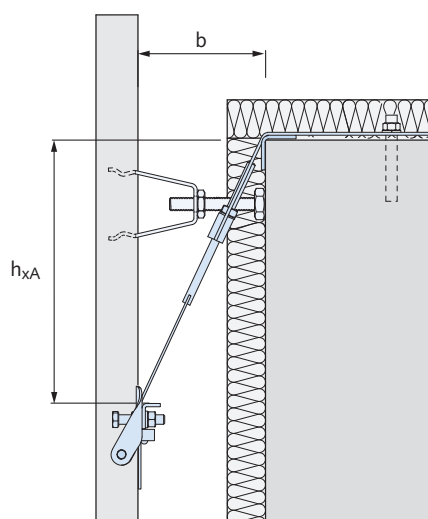



FPA-5S-SL30

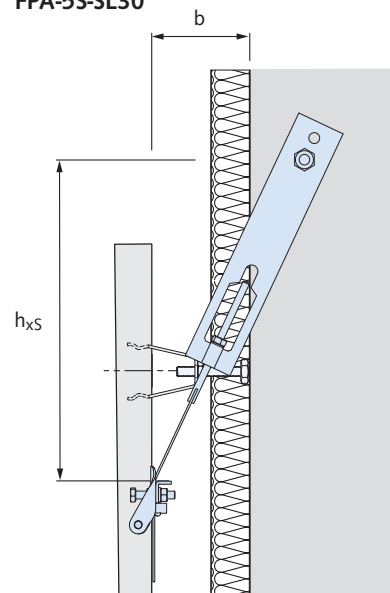

Specifications Perforated strap for FPA-5/ -5A/ -5S -SL30

Load group	5.0				
Wall spacing b [mm]	h _x	h _{xA}	h _{xS}	L ①	Z
80	190	175	390	246	188
90	210	195	410	(4/S)	209
100	230	215	430	435 (12/ M)	230
110	255	240	455		251
120	275	260	475		272
130	295	280	495		293
140	315	305	520		314
150	340	325	540		356
160	360	345	560		377
170	380	365	580		398
180	405	390	605	645 (12/ L)	419
190	425	410	625		440
200	445	430	645		461
210	470	455	670		482
220	490	475	690		524
230	510	495	710		545
240	530	515	730		566
250	555	540	755	855 (12/ XL)	587
260	575	560	775		608
270	595	580	795		629
280	620	605	820		650
290	640	625	840		671
300	660	645	860		692
310	680	665	880		734
320	705	690	905		755
330	725	710	925		776
340	745	730	945		797
350	770	755	970		818

① Number of slots/Type of perforated strap
(S/M/L/XL) see values in bracket

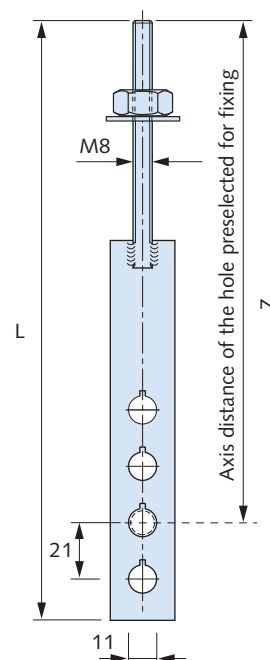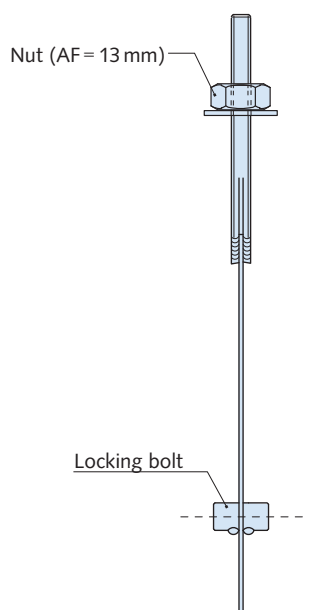


Note: Perforated straps for larger wall spacings are available on request

HALFEN ANCHORING SYSTEMS CONCRETE FAÇADES

Installation of the FPA-SL30 Façade Panel Anchor

1. Installation of the FPA-E-SL30 Cast-in component

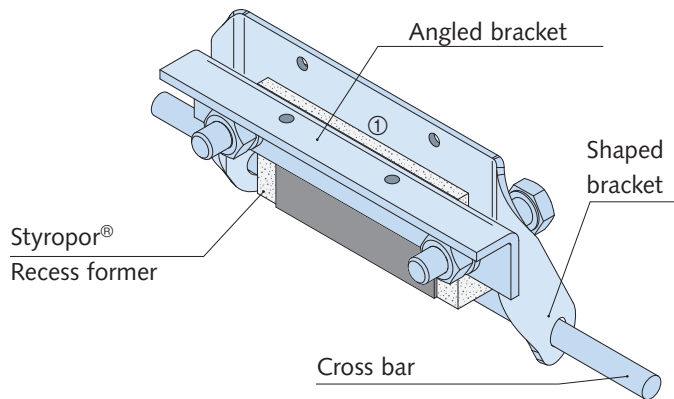

i The FPA-E-SL30 Cast-in component is delivered preassembled.



1.1 Fix the cast-in element (shaped bracket) with nails to the auxiliary aid. Nail holes are provided in the shaped bracket and in the angled bracket.

! The auxiliary aid must be flush with the final concrete surface! ①
CS = bottom surface auxiliary aid!

1.2 Fix the auxiliary aid to the formwork. Planned concrete cover at the (hexagon) bolts;
nom = f - 26 mm.


Install the slab reinforcement over the cast-in element up to the edge.

1.3 Pour the concrete for the precast component and compact the concrete properly (not illustrated).

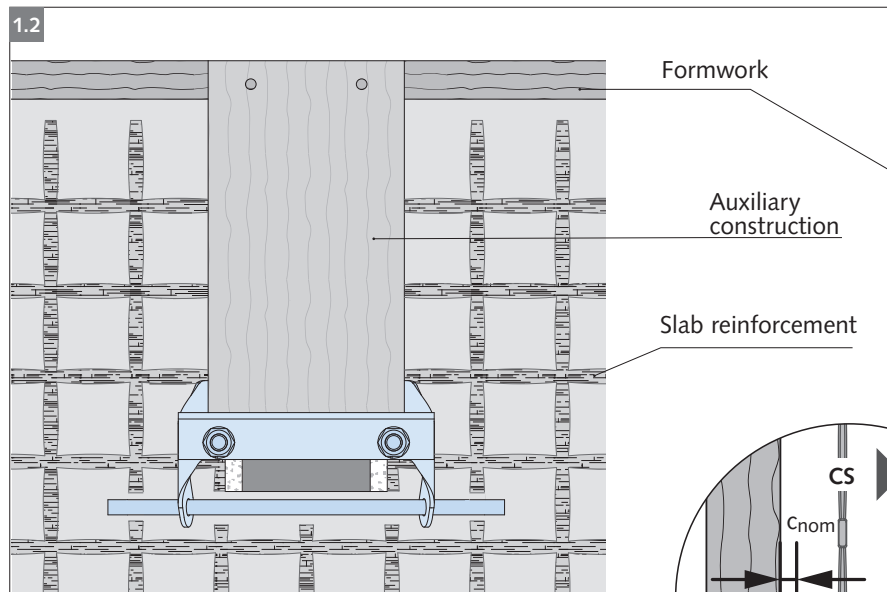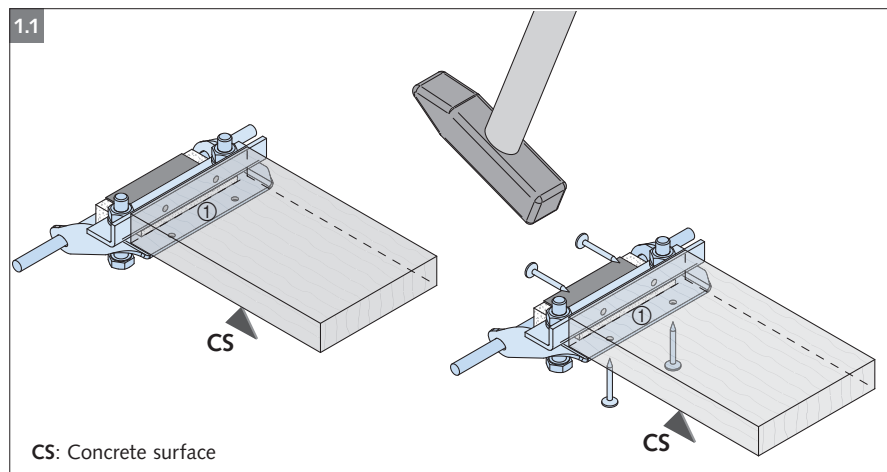

! **NOTE:**
Minimal concrete cover
compact properly!


CS: Concrete surface

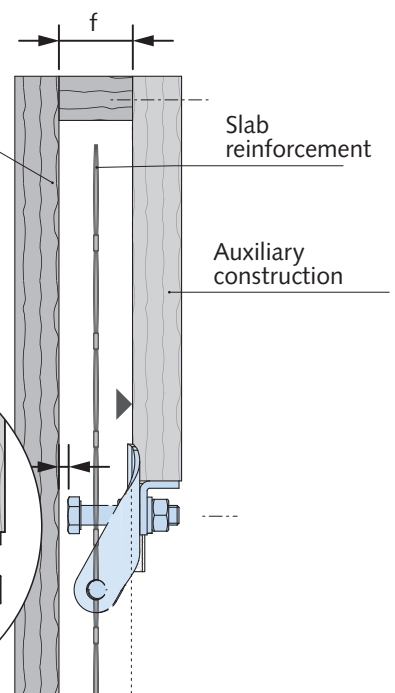


HALFEN ANCHORING SYSTEMS CONCRETE FAÇADES

Installation of the FPA-SL30 Façade Panel Anchor


2. Fixing the façade panel to the load-bearing component

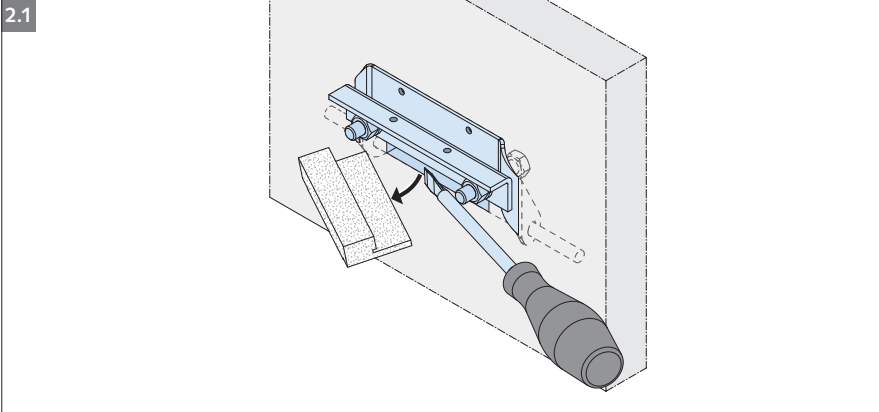


- 2.1 Before installation of the panel remove the polystyrene recess former. Any polystyrene left in the gap between the shaped bracket and the angled bracket can be removed using the perforated strap.
- Retightened any loosened nuts (nut size 13 mm) with a torque wrench set to 5 Nm.

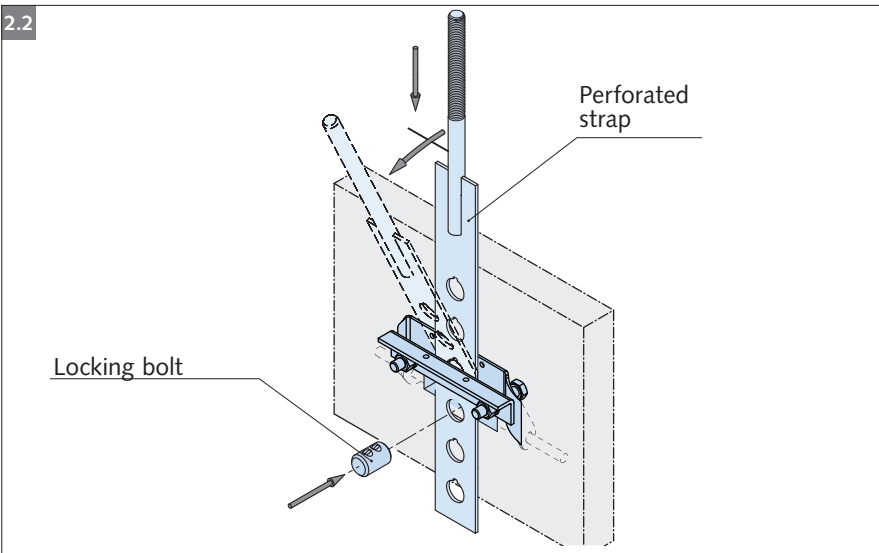

- 2.2 Insert the perforated strap between the shaped bracket and angled bracket. Pre-assemble the perforated strap to the required length according to the specified length. Secure the perforated strap using the locking bolt (rotate the bolt half a turn = 180°) and bend the strap over the angled bracket.

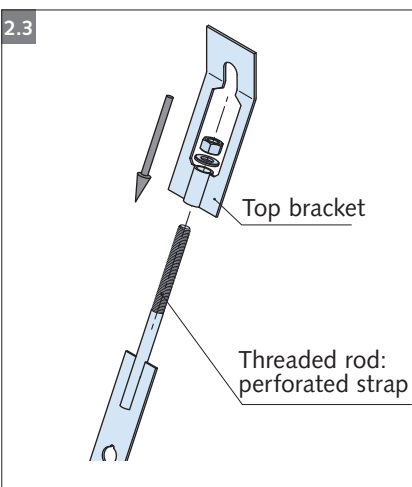

- 2.3 Attach the top bracket to the threaded rod of the perforated strap using washers and nuts. For type FPA-5A-SL30 we recommend using the top bracket as a template to facilitate correct positioning of the drill holes for assembly.

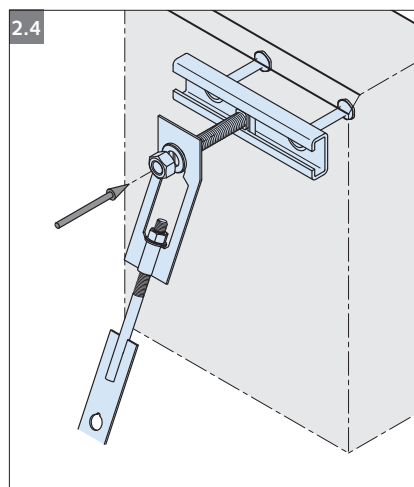

- 2.4 Fasten the precast façade panel with the fitted, pre-assembled FPA-5-SL30 to the load bearing structure (on site drilled dowel or cast-in HALFEN Channel). Adjust the precast element by turning the nut on the perforated strap.



During adjustment the precast panel remains suspended from the crane hook.



The hexagon nuts in the FPA-system are factory coated with Molykote® HSC-Spray.

In some cases, for example after pro-longed outside storage, it may be necessary to renew this coating.



HALFEN ANCHORING SYSTEMS CONCRETE FAÇADES

Horizontal Anchorage and Dowels

Notes:

HALFEN has two different building authority approved systems for transferring horizontal pressure and tensile loads and adjusting correct wall spacings:

- DS13-SL30 spacer bolts with tensile/compressive sockets are installed at the upper edge of the panel to transfer compression from dead load and wind pressure.
- To facilitate assembly, dowels are commonly used to connect façade panels together which are installed one on top of another. This is done with HFV-SL30 anchoring elements installed close to the edges of adjacent panel edges and connected to each other using HFV 3 dowels and grout.

Appropriate anchors may be required to account for wind suction due to the low dead weight of thin façade panels.


The LD and LD-A Adjustable restraints used together with DS13-SL30 tension/pressure anchorage provide an effective solution.

Tension and pressure-resistant connections in the spacing between parallel elements

Spacer bolt DS13-SL30

Page 15


- Anchorage in concrete is building authority approved
- type-tested spacer bolt for wall spacing ≤ 500 mm

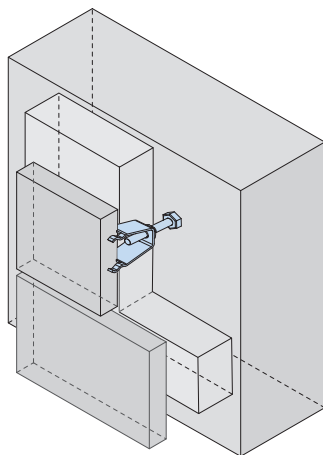

Adjustable restraint LD

Page 18


- for wall spacing ≥ 10 cm
- tension load capacity $F_{Rd} = 5.25$ kN

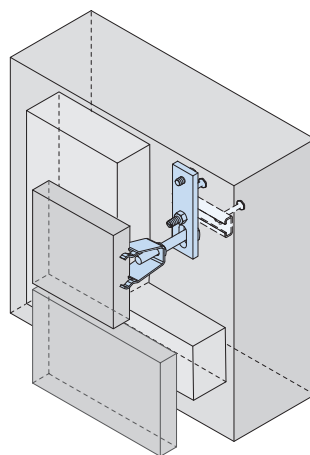

Adjustable restraint LD-A

Page 19


- for wall spacing ≥ 12 cm
- tension load capacity $F_{Rd} = 5.25$ kN

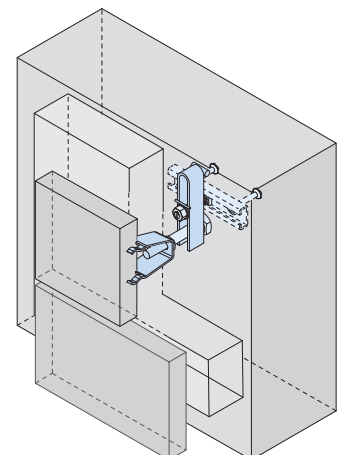

HFV-SL30 Dowel System

Page 20

- building authority approved
- shear load capacity $F_{Rd} = 2.7$ kN

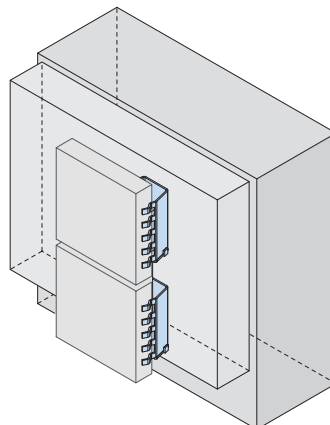


HALFEN ANCHORING SYSTEMS CONCRETE FAÇADES

HALFEN DS13-SL30 Spacer bolt

DS13-SL30

Type tested

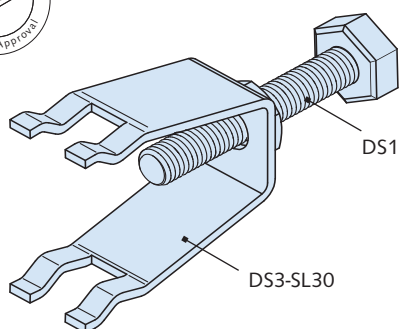

DS13-SL30 Spacer bolt

includes:


DS1 Spacer bolt and DS3-SL30 Tension/pressure sleeve

Order example

DS 13 - SL30 - 12 - 120

① ② ③ ④


- ① Type
- ② Version
- ③ Thread
- ④ Wall spacing

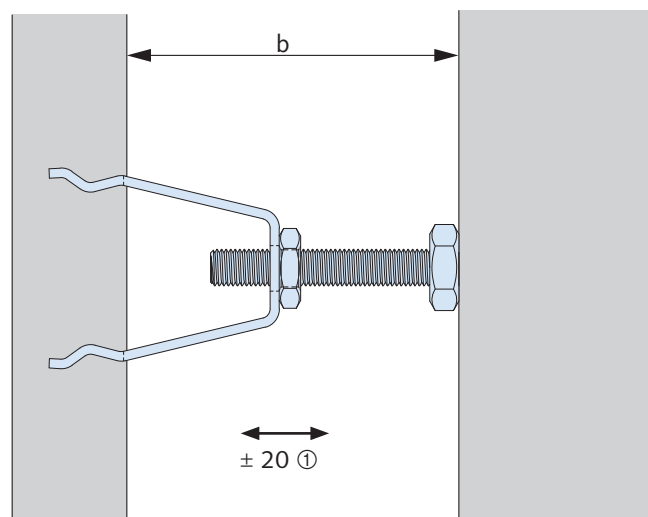

① Reduced adjustment range for b=80mm (+20/-14mm)

Material: A4/L4
(Material specifications, see page 5)

DS1 dimensions

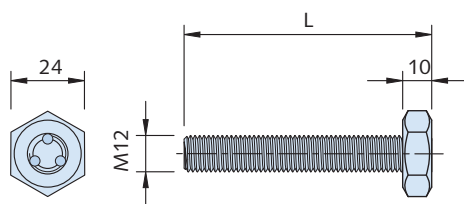


Spacer bolt lengths

b [mm]	80	90 - 100	110 - 120	130 - 140	150 - 160	170 - 180	190 - 200	210 - 220	230 - 240	250 - 260	270 - 280
L [mm]	52	72	92	112	132	152	172	192	212	232	252

further lengths are available on request

DS3-SL30 dimensions

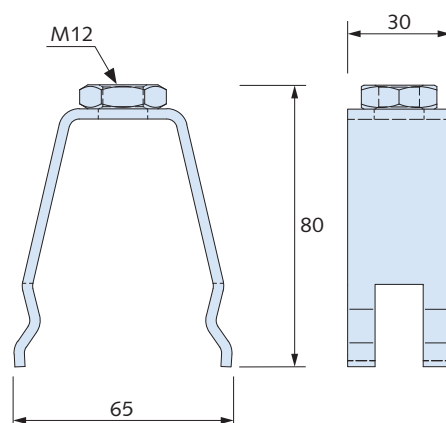



HALFEN ANCHORING SYSTEMS CONCRETE FAÇADES

Installation Instructions DS3-SL30

Edge distances, anchoring depth

The following specification must be observed for installation



An axial distance of ≥ 150 mm to both edges of the panel.

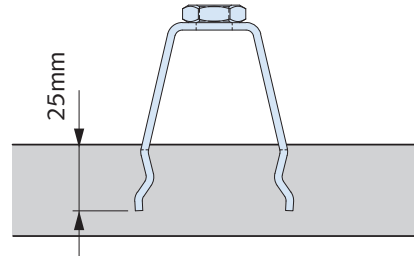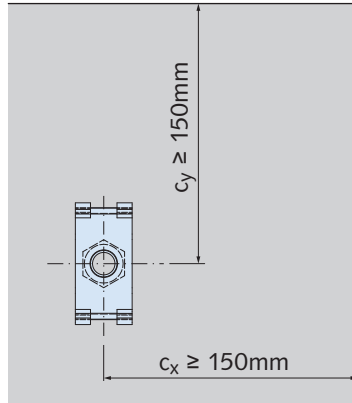

DS3-SL30 are installed with an anchoring depth of 25 mm.

Required additional reinforcement



To avoid splitting failure, each DS3-SL30 tension/pressure sleeve must be reinforced with 4 rebars B500 A/B-Ø 6-A4, L=250mm arranged as shown:

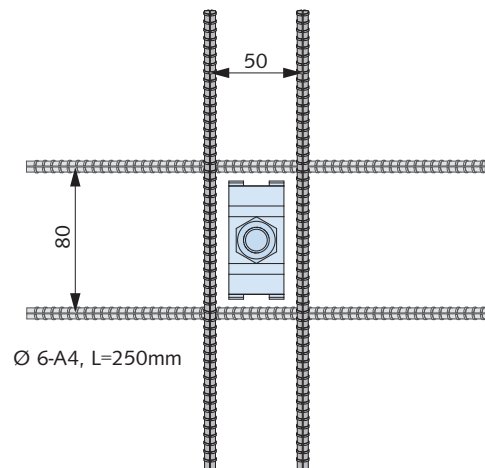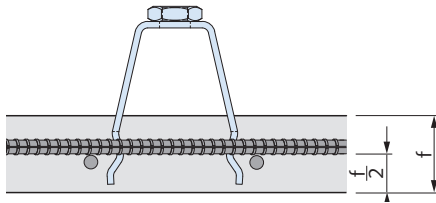

Slab Reinforcement

In accordance with the static requirements of the slab design, at least one single-layer of steel or non-steel mesh reinforcement must be installed in the area of the anchors. An installation with a solidian GRID Q121/121-AAE-38 mesh reinforcement is shown exemplarily.

solidian GRID Q121/121-AAE-38

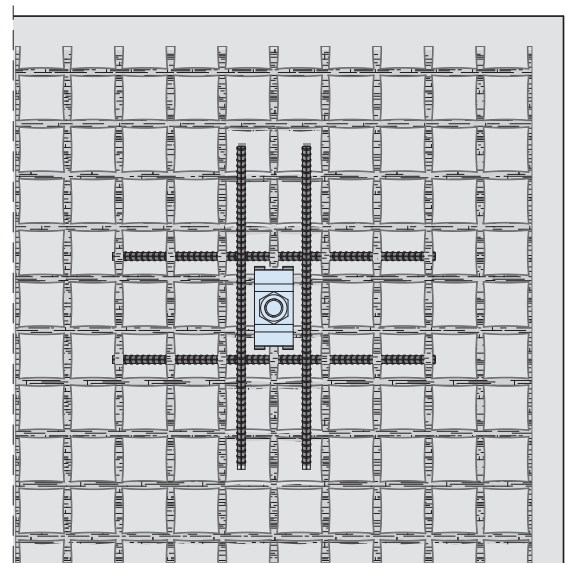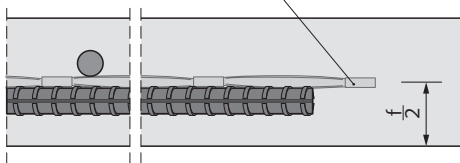


HALFEN ANCHORING SYSTEMS CONCRETE FAÇADES

Load capacities DS13-SL30

Load capacities DS13-SL30

The minimum strength of the two DS3-SL30 and DS1 components determines the compressive strength of the DS13-SL30. For tensile loads the load capacities of the DS3-SL30 apply.

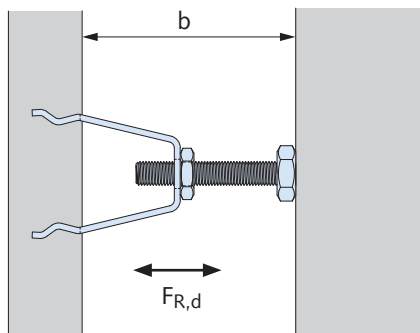

Tension load capacities F_{Rd} [kN] DS3-SL30

Condition	for edge spacing $c_{x,cy} \geq 150$	for edge spacing $c_{x,cy} \geq 250$
noncracked	4.5	6.6
cracked	2.6	3.8

Pressure load capacities F_{Rd} [kN] DS3-SL30

Condition	for edge spacing $c_{x,cy} \geq 150$	for edge spacing $c_{x,cy} \geq 250$
noncracked	7.0	7.5
cracked	5.0	5.4

Pressure load capacities F_{Rd} [kN] DS1

Wall spacing b [mm]	280	300	320	340	360	380	400
80 - 250							
≥ 7.5	6.3	5.7	4.8	4.3	3.6	3.3	3.0

The load capacities have been reduced compared to the values in the type test to take unfavourable influences during assembly into account.




We recommend using the HALFEN FPA Calculation software for the exact calculation of loads and resistances.

HALFEN ANCHORING SYSTEMS CONCRETE FAÇADES

Tension and Compression Resistant Connections in the Spacing between Parallel Surfaces

HALFEN LD Adjustable restraint

Application: For tension and compression loads

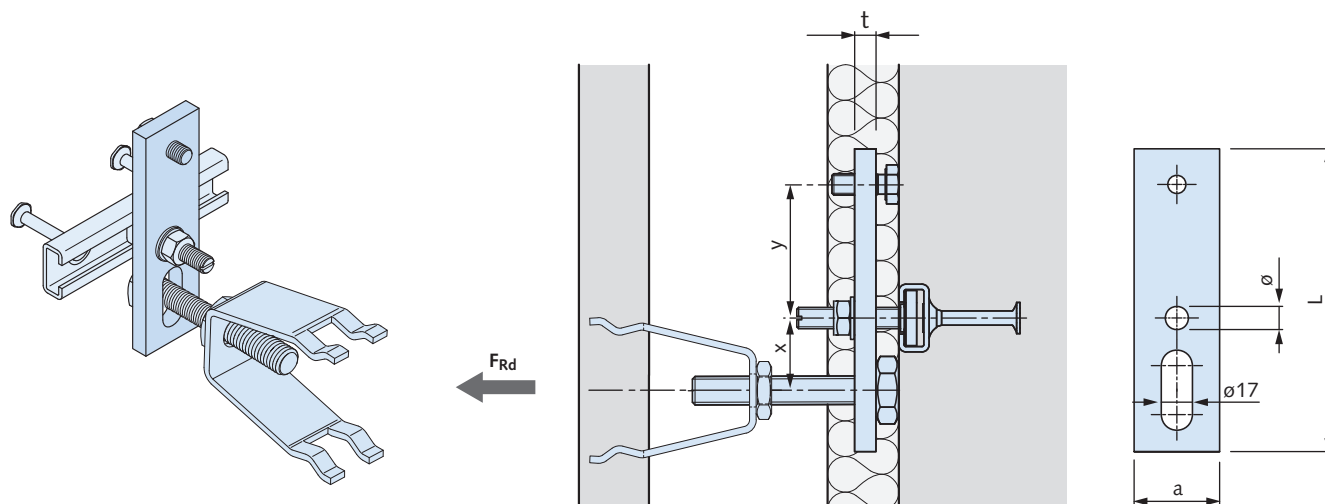

Material: A4/L4

(Material specifications, see page 5)

Order example

Description:

LD - 3,5

① ②

① Type

② Load group

Scope of delivery

Adjustable restraint with adjustment bolt

Approved dowels can also be used instead of the HALFEN Cast-in channel and T-bolt.

Order spacer bolt separately, see page 15

Installation

1. Insert the spacer bolt through the slot in the lug.
2. Screw the spacer bolt into the DS3-SL30 and adjust.
3. Roughly place the assembly in the HALFEN Channel.
4. Adjust the adjustment bolt so that the lug is parallel to the main support structure.
5. Tighten the HALFEN T-bolt.

HALFEN LD Adjustable restraint

Type	Load group	Load capacity F_{Rd} [kN]	L [mm]	a [mm]	t [mm]	$x \pm 15$ [mm]	y [mm]	Ø [mm]	Recommended fixing ①	HALFEN T-bolt ②
LD	2.0	3.00	161	40	10	38	75	11	HTA-CE 28/15	HS 28/15 M10x40
	3.5	5.25	170	48	12	40	75	13	HTA-CE 38/17	HS 38/17 M12x50

① 150, 200 and 250 mm short pieces must be ordered separately.

Verification of the anchorage must be provided taking the respective boundary conditions. into account

② Please order the HALFEN T-bolt separately


See tables on page 17 for allowable load capacities for the DS13-SL30

HALFEN ANCHORING SYSTEMS CONCRETE FAÇADES

Tension and Compression Resistant Connections in the Spacing between Parallel Surfaces

HALFEN LD-A Adjustable restraint

Application: For tension and compression loads

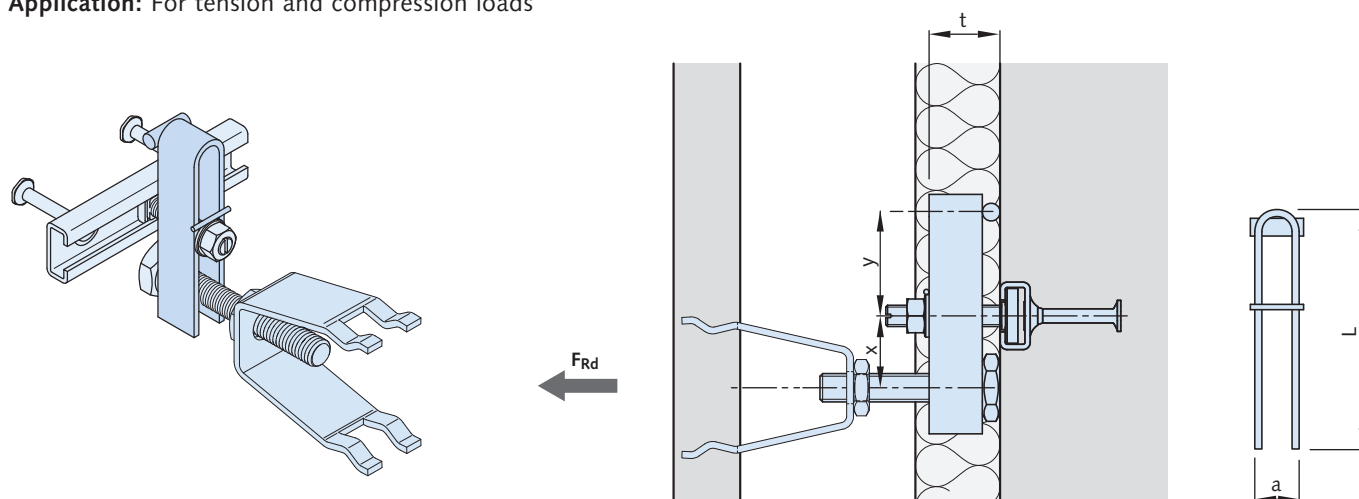

Material: A4/L4

(Material specifications, see page 5)

Order example

Description:

LD-A - 3,5 - 12

① ② ③

- ① Type
- ② Load group
- ③ Spacer bolt thread size

Scope of delivery

Fork clamp

Order spacer bolt separately,
see page 15

Application

Tension- and pressure-resistant
connection of façade panels with the
main support structure.
Adjustable in three directions.

HALFEN LD-A Adjustable restraint

Type	Load group	Load capacity F_{Rd} [kN]	L [mm]	a [mm]	t [mm]	x ± 15 [mm]	y [mm]	Spacer bolt	Recommended fixing ①	HALFEN T-bolt ②	Washer DIN
LD-A	1,8	2,70	130	21	33	40	60	M12	HTA-CE 28/15	HS 28/15 M10×50	DIN 9021
	3,5	5,25	135	21	41	40	60	M12	HTA-CE 38/17	HS 38/17 M12×80	DIN 125

① 150, 200 and 250 mm short pieces must be ordered separately.

Verification of the anchorage must be provided taking the respective boundary conditions into account


② Please order the HALFEN T-bolt separately

See tables on page 17 for allowable load capacities for the DS13-SL30

HALFEN ANCHORING SYSTEMS CONCRETE FAÇADES

HALFEN HFV-SL30 Dowel system


Overview

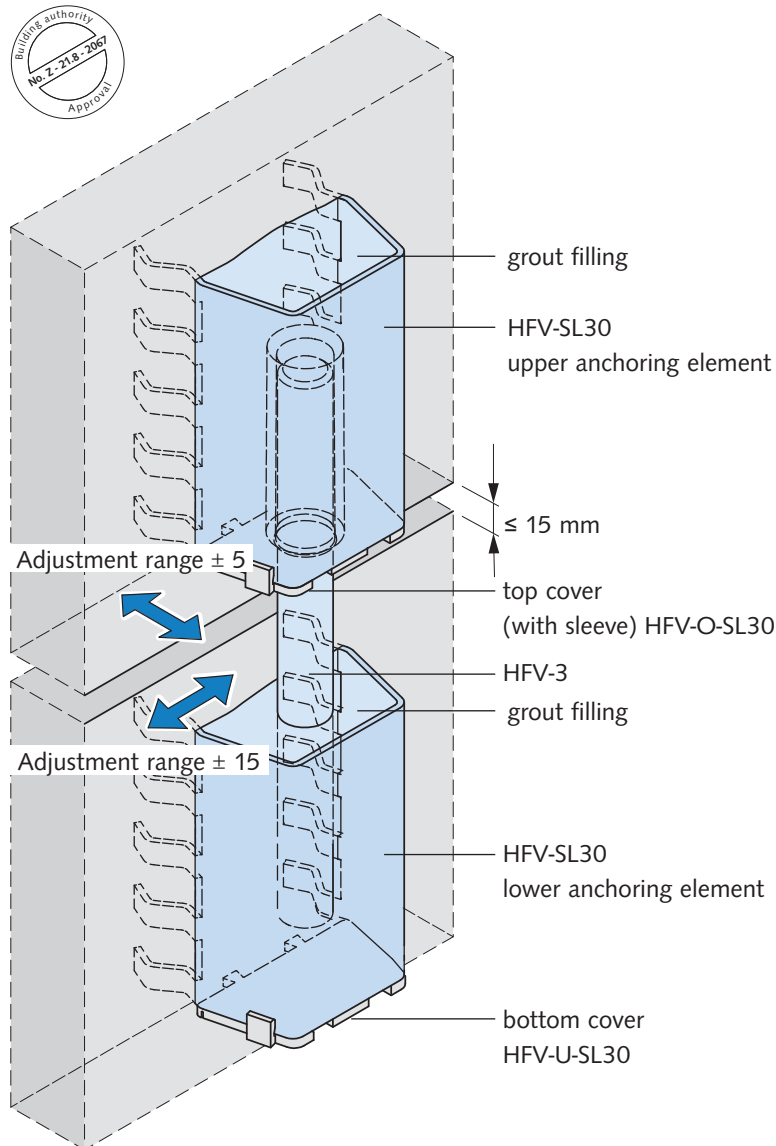


The HFV-SL30 system is used for the dowel connection of thin façade panels with a joint gap of ≤ 15 mm.

For the load transmission from the upper to the lower anchoring element, both HFV-SL30 must be filled with grout for example; PAGEL V1®/50 (see the general building authority approval or the HALFEN assembly instructions for grout specifications). The upper anchoring body, which is sealed with a cover cap with fitted sleeve, can be previously filled with grout in the precast plant. The lower anchoring body is filled with grout directly before assembly, so that the HFV 3 dowel which is inserted from above can be fixed in the specified position within the processing time of the grout.

HFV-Z-SL30 Set

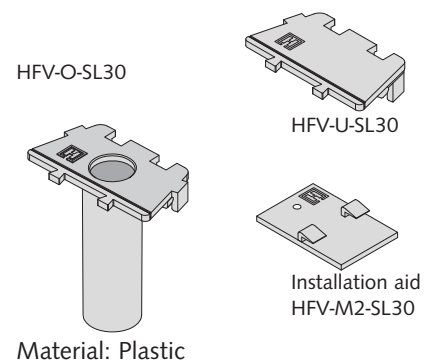


HFV-SL30 Anchoring body

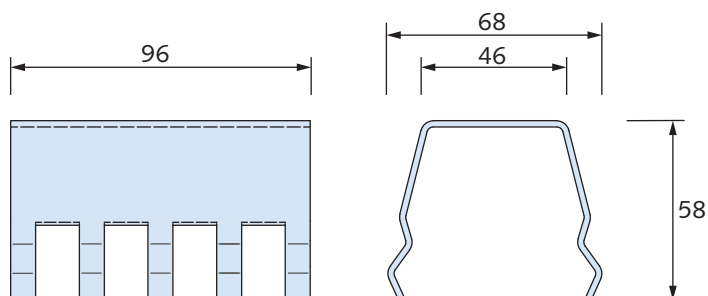

Material: A4/L4 (Material specification see page 5)

HFV-3 Dowel

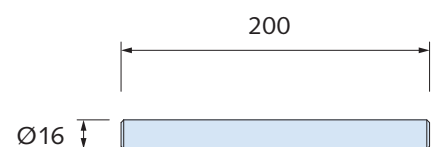

Material: A4/L4
(Material specification see page 5)

HALFEN ANCHORING SYSTEMS CONCRETE FAÇADES



HALFEN HFV-SL30 Dowel system - Installation Instructions

Edge distances, anchoring depth

The following must be observed:

The design of the system requires an edge distance of 25 mm in the dowel direction. In the orthogonal direction a minimum edge distance of 250 mm must be maintained.



The anchoring element HFV-SL30 must be installed with an anchorage depth of 25 mm.

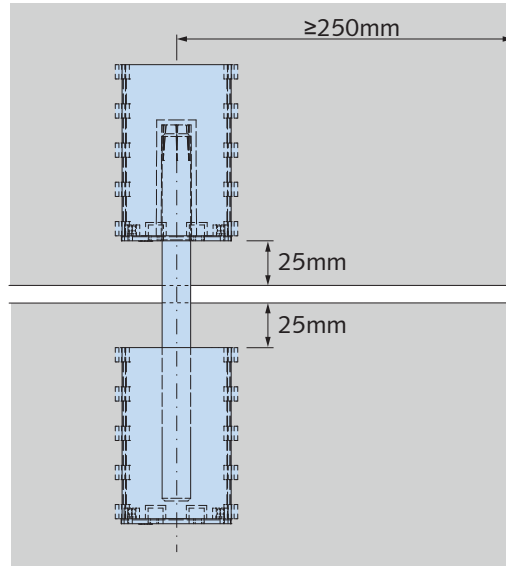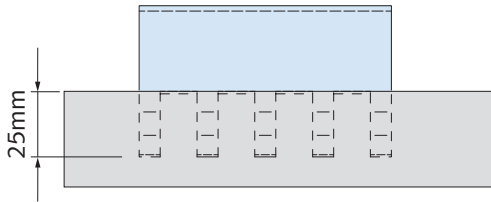

Required additional reinforcement

To avoid splitting failure, four B500 A/B rebars $\varnothing 6$ -A4 (3 x L = 250 mm, 1 x L = 400 mm) must be arranged centrally at each HFV-SL30 anchoring element.


Double dowels must be installed with a axial spacing of 180 - 200 mm. Dimensions and spacings of the centrally arranged A4 additional reinforcement bars are shown in the following diagram:

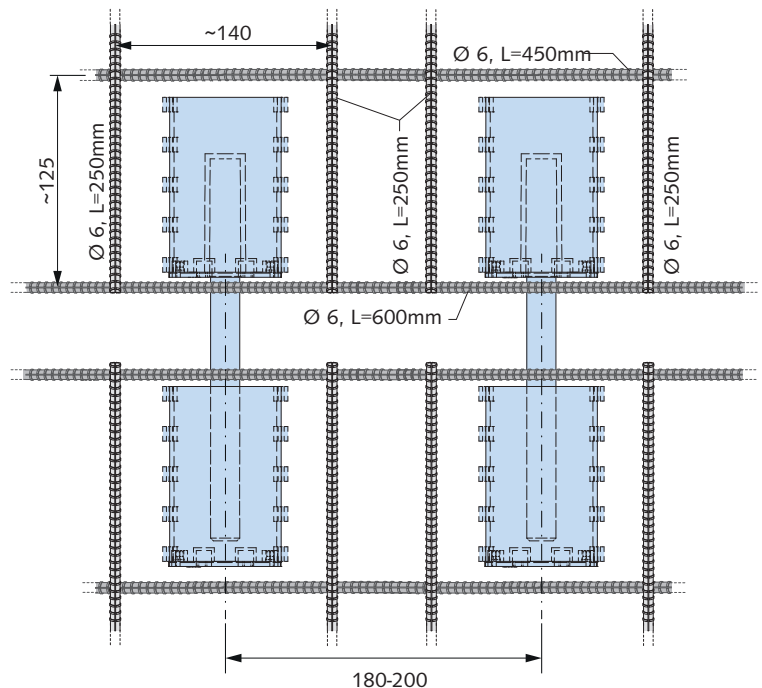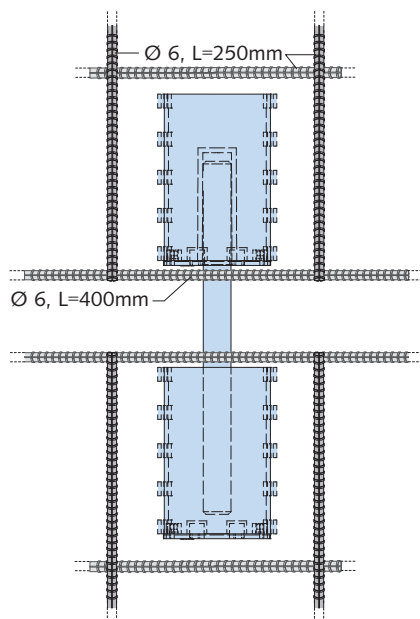

HALFEN ANCHORING SYSTEMS CONCRETE FAÇADES


HALFEN HFV-SL30 Dowel system

Slab Reinforcement

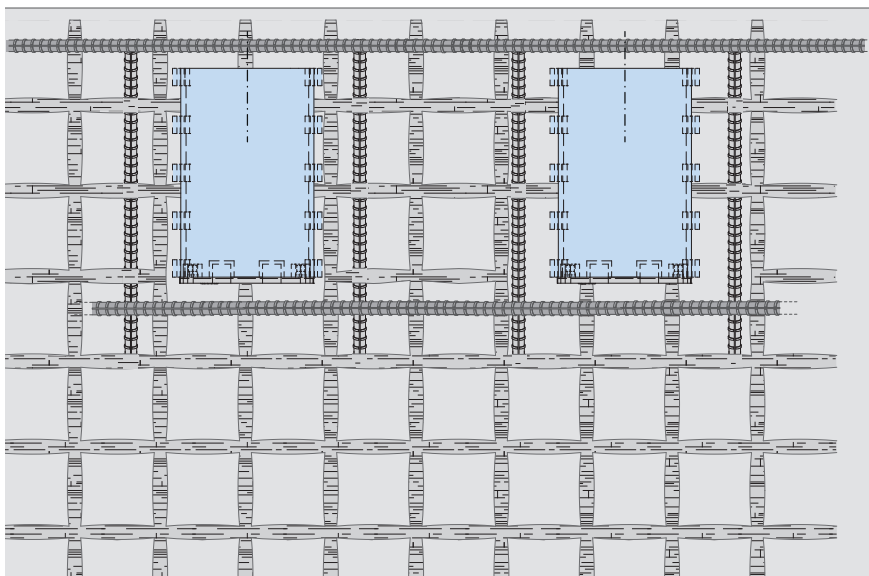


In accordance with the static requirements of the slab design, at least one single-layer of steel or non-steel mesh reinforcement must be installed in the area of the anchors. An installation with a solidian GRID Q121/121-AAE-38 mesh reinforcement is shown exemplarily.

solidian GRID Q121/121-AAE-38

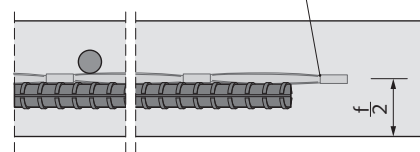

Load capacities HFV-SL30

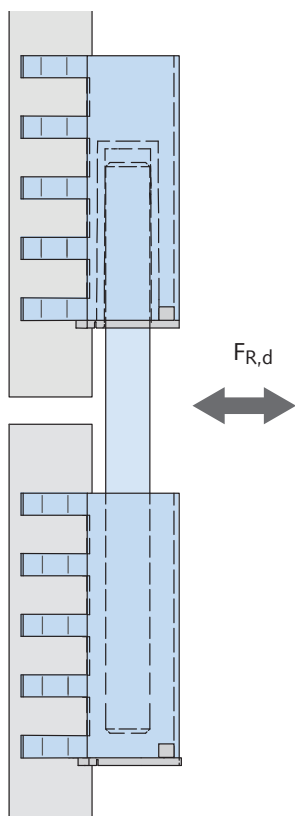

Load capacities $F_{R,d}$ [kN]

Condition	Standard dowel	Double dowel
cracked/ noncracked	2.7	4.3



We recommend using our FPA software for precise calculation of loads and resistances.

HALFEN ANCHORING SYSTEMS CONCRETE FAÇADES

Calculation form - thermal transfer coefficient

The calculation of the heat transfer coefficient for HALFEN façade panel anchors and spacer bolts is based on the method shown.




Confirmed by expert opinion,
Certificate 18C096Y.

Anchor value A_{eq}	
HALFEN FPA	A_{eq}
FPA-SL30	0,65
HALFEN Horizontal anchorage	A_{eq}
DS13-SL30	1,5


Insulation	
d [cm]	
λ [W/(mK)]	
d_k [-]	

Diagram: Insulation material value d_k

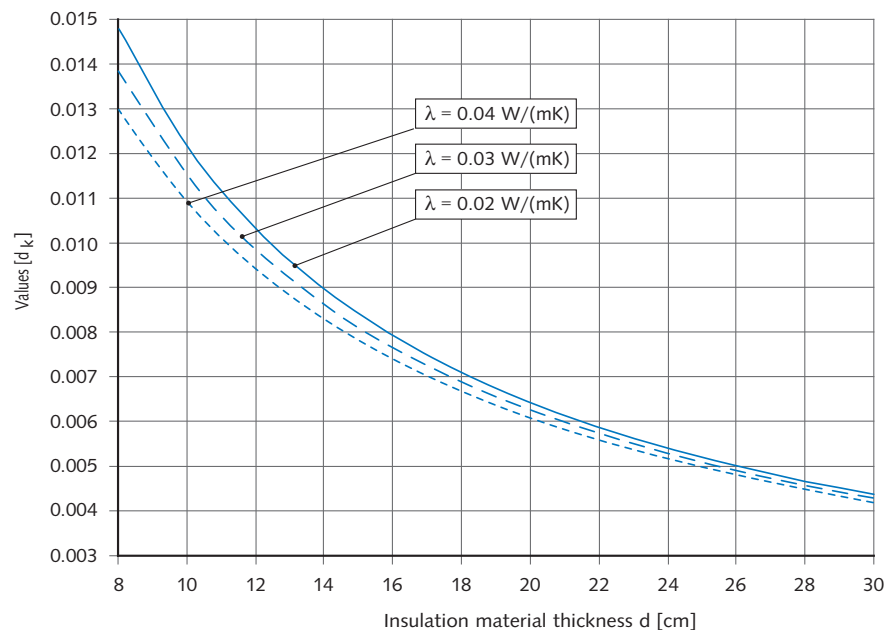

Calculation factor U Value;				
	A_{eq}	$\chi_i = A_{eq} \times d_k$	n_a Number of FPA / spacer bolts req. for each m ²	$\Delta U_i = \chi_i \times n_a$
FPA -SL30				
DS13-SL30				
U Value; calculation factor for the exterior wall $\Sigma \Delta U_i = \chi_i \times n_a$				

Lifting anchor system for thin façade panels

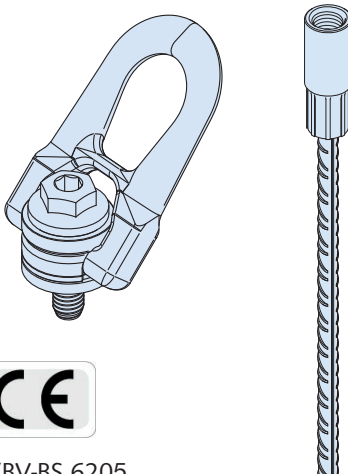

The HALFEN HD-SL30 Lifting anchor system in load group 0.8 was developed for reliable lifting and transporting of thin prefabricated concrete elements with a thickness of ≥ 3.0 cm.

As with all HALFEN Lifting anchor systems, the HD-SL30 system also complies with the requirements of the European Machinery Directive (MD) 2006/42/EC.

To ensure the load-bearing capacity when embedded, the HALFEN Lifting anchor systems are additionally subject to the requirements of VDI/BV-BS* guideline 6205.

VDI/BV-BS* = Bundesverband Bausysteme e.V. Association of structural systems



Get more information about **HALFEN Lifting anchor systems** at
www.halfen.com ▶ Products ▶ Lifting systems

VDI/BV-BS 6205

CONTACT HALFEN WORLDWIDE

HALFEN is represented by subsidiaries in the following countries, please contact us!

Austria	HALFEN Gesellschaft m.b.H. Leonard-Bernstein-Str. 10 1220 Wien	Phone: +43-1-259 6770 E-Mail: office@halfen.at Internet: www.halfen.at	
Belgium / Luxembourg	HALFEN N.V. Borkelstraat 131 2900 Schoten	Phone: +32-3-658 07 20 E-Mail: info@halfen.be Internet: www.halfen.be	Fax: +32-3-658 15 33
China	HALFEN Construction Accessories Distribution Co.Ltd. Room 601 Tower D, Vantone Centre No. A6 Chao Yang Men Wai Street Chaoyang District Beijing · P.R. China 100020	Phone: +86-10 5907 3200 E-Mail: info@halfen.cn Internet: www.halfen.cn	Fax: +86-10 5907 32 18
Czech Republic	HALFEN s.r.o. Business Center Šafránková Šafránková 1238/1 155 00 Praha 5	Phone: +420-311-690 060 E-Mail: info@halfen.cz Internet: www.halfen.cz	Fax: +420-235-314 308
France	HALFEN S.A.S. 18, rue Goubet 75019 Paris	Phone: +33-1-445231 00 E-Mail: halfen@halfen.fr Internet: www.halfen.fr	Fax: +33-1-445231 52
Germany	HALFEN Vertriebsgesellschaft mbH Liebigstr. 14 40764 Langenfeld	Phone: +49-2173-970-0 E-Mail: info@halfen.de Internet: www.halfen.de	Fax: +49-2173-970 225
Italy	HALFEN S.r.l. Soc. Unipersonale Via F.lli Bronzetti N° 28 24124 Bergamo	Phone: +39-035-0760711 E-Mail: tecnico@halfen.it Internet: www.halfen.it	Fax: +39-035-0760799
Netherlands	HALFEN b.v. Oostermaat 3 7623 CS Borne	Phone: +31-74-267 14 49 E-Mail: info@halfen.nl Internet: www.halfen.nl	Fax: +31-74-267 26 59
Norway	HALFEN AS Postboks 2080 4095 Stavanger	Phone: +47-51 82 34 00 E-Mail: post@halfen.no Internet: www.halfen.no	
Poland	HALFEN Sp. z o.o. Ul. Obornicka 287 60-691 Poznan	Phone: +48-61-622 14 14 E-Mail: info@halfen.pl Internet: www.halfen.pl	Fax: +48-61-622 14 15
Spain	HALFEN IBERICA, S.L. Polígono Industrial Santa Ana c/ Ignacio Zuloaga 20 28522 Rivas-Vaciamadrid	Phone: +34 91 632 18 40 E-Mail: info@halfen.es Internet: www.halfen.es	Fax: +34-91 633 42 57
Sweden	Halfen AB Vädersgatan 5 412 50 Göteborg	Phone: +46-31-98 58 00 E-Mail: info@halfen.se Internet: www.halfen.se	Fax: +46-31-98 58 01
Switzerland	HALFEN Swiss AG Hertistrasse 25 8304 Wallisellen	Phone: +41-44-849 78 78 E-Mail: info@halfen.ch Internet: www.halfen.ch	Fax: +41-44-849 78 79
United Kingdom / Ireland	HALFEN Ltd. A1/A2 Portland Close Houghton Regis LU5 5AW	Phone: +44-1582-47 03 00 E-Mail: info@halfen.co.uk Internet: www.halfen.co.uk	Fax: +44-1582-47 03 04
United States of America	HALFEN USA Inc. PO Box 18687 San Antonio TX 78218	Phone: +1 800.423.91 40 E-Mail: info@halfenusa.com Internet: www.halfenusa.com	Fax: +1 877.683.4910
For countries not listed HALFEN International	HALFEN International GmbH Liebigstr. 14 40764 Langenfeld / Germany	Phone: +49-2173-970-0 E-Mail: info@halfen.com Internet: www.halfen.com	Fax: +49-2173-970-849

HALFEN is represented with sales offices and distributors worldwide. Please contact us: www.halfen.com

NOTES REGARDING THIS CATALOGUE

Technical and design changes reserved. The information in this publication is based on state-of-the-art technology at the time of publication. We reserve the right to make technical and design changes at any time. HALFEN GmbH shall not accept liability for the accuracy of the information in this publication or for any printing errors.

The HALFEN GmbH subsidiaries in Germany, France, the Netherlands, Austria, Poland, Switzerland and the Czech Republic are Quality Management certified according to **ISO 9001:2015**, Certificate no. 202384-2016-AQ-GER-DAKKS.

